

TRADESMAN

MANUFACTURING

DUCT

;[@EF3>>3F;A@](#);[@EFDG5F;A@E](#),

EF7B #[Ž](#)GeWd[hWS` V e`[b UV8fefa La` ` Wf
eWf[a` eaXVgUf faYWZVž

EF7B \$[Ž](#)BgeZ UV8f #y**b**Sef VgUf[Yž


EF7B %[Ž](#)5gf afZVdWV Sf S #yahW/Sb i [fZ e` [bež

F;BE,

;[V](#)gef[S^fSbW/a[[†](#)adeV8^VdUS` TWgeWž**Duct hangers must be used every 5'.**

I 3D@;@9~

**;[_](#) bcbVd[efS^Sf[a` _ Sk dVg^f[VS_ SYWfa
bcbVgUf ad[VV[UWU[Vž[fZVkefV žGeWbcbVd
BB7S` V Vžg[b_ WfVgd[Y Ujff[YI TWV[YI S` V
[efS^Sf[a` bcbUWVž;X^aUS^LaVWV[VWVXb_ fZVWV
[efqUf[a` eXa^ai ^aUS^Tg[V[Y LaVWž**

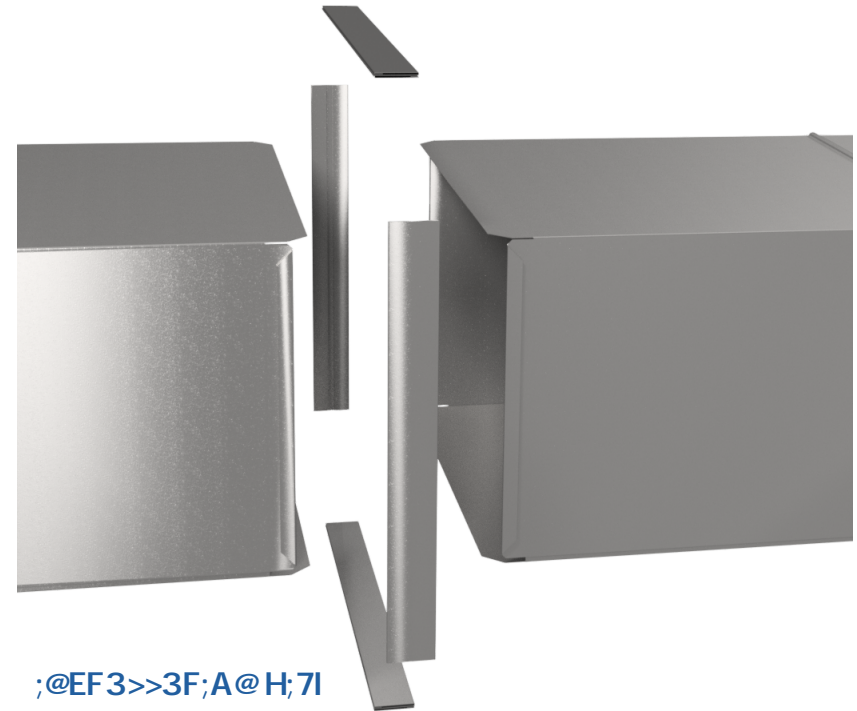

[;\[@EF3>>3F;A@H;7I\]\(#\)](#)

[3EE7? 4>76 H;7I](#)

[\(403\) 327-9871](tel:(403)327-9871)

sales@tradesmanmfg.ca

www.tradesmanmfg.ca

Specifications are subject to change without notice or obligation. All Tradesman Manufacturing products are guaranteed against defective material.